Dynegy Midwest Generation, LLC
1500 Eastport Plaza Dr.
Collinsville, IL 62234

January 28, 2023

Illinois Environmental Protection Agency
1021 North Grand Avenue East
P.O. Box 19276
Springfield, IL 62794-9276

Re: Hennepin Old West Ash Pond System (IEPA ID: W1550100002-01, 03) 2022 Annual Consolidated Report

Dear Mr. LeCrone:

In accordance with 35 IAC § 845.550, Dynegy Midwest Generation, LLC (DMG) is submitting the annual consolidated report for the Hennepin Old West Ash Pond System (IEPA ID: W1550100002-01, 03), as enclosed.

Sincerely,

Dianna Tickner
Sr. Director Decommissioning & Demolition

Enclosures

Annual Consolidated Report
Dynegy Midwest Generation, LLC
Hennepin Power Plant
Old West Ash Pond System; IEPA **ID: W1550100002-01, 03**

In accordance with 35 IAC § 845.550, Dynegy Midwest Generation, LLC (DMG) has prepared the annual consolidated report. The report is provided in two sections as follows:

Section 1
1) Annual CCR fugitive dust control report (Section 845.500(c))

Section 2
2) Annual inspection report (Section 845.540(b)), including:

A) Annual hazard potential classification certification

B) Annual structural stability assessment certification

C) Annual safety factor assessment certification

D) Inflow design flood control system plan certification

Section 3
3) Annual Groundwater Monitoring and Corrective Action Report (Section 845.610(e))

Section 1

Annual CCR Fugitive Dust Control Report

Annual CCR Fugitive Dust Control Report

for

Hennepin Power Plant

Prepared for:

Luminant

Dynegy Midwest Generation, LLC

Hennepin Power Plant
13498 East 800th Street
Hennepin, IL 61327

November 2022

Hennepin Power Plant
ANNUAL CCR FUGITIVE DUST CONTROL REPORT

Reporting Year: 4th Quarter 2021 through 3rd Quarter 2022

Completed by: Mike Olle — Plant Environmental Supervisor

Name — Title

This Annual CCR Fugitive Dust Control Report has been prepared for the Hennepin Power Plant in accordance with 40 CFR 257.80(c) and 35 I.A.C. 845.500. Section 1 provides a description of the actions taken to control CCR fugitive dust at the facility during the reporting year, including a summary of any corrective measures taken. Section 2 provides a record of citizen complaints received concerning CCR fugitive dust at the facility during the reporting year, including a summary of any corrective measures taken.

Section 1 Actions Taken to Control CCR Fugitive Dust

In accordance with the Hennepin Power Plant CCR Fugitive Dust Control Plan (Plan), the following measures were used to control CCR fugitive dust from becoming airborne at the facility during the reporting year:

CCR Activity	Actions Taken to Control CCR Fugitive Dust
Management of CCR in the facility's CCR units	CCR to be emplaced in the landfill will be conditioned before emplacement.
	Water dry CCR material from periodic cleanout / maintenance of CCR handling or CCR dust control systems as it is added into the CCR surface impoundments, as necessary.
	Wet management of CCR bottom ash in CCR surface impoundments.
	Water areas of exposed CCR in CCR units, as necessary.
	Naturally occurring grass vegetation in areas of exposed CCR in CCR surface impoundments.
	Apply chemical dust suppressant on areas of exposed CCR in CCR units, as necessary.
	Wet sluice CCR fly ash and CCR bottom ash to CCR surface impoundments.

CCR Activity	Actions Taken to Control CCR Fugitive Dust
Handling of CCR at the facility	Pneumatically convey dry CCR fly ash and FGD ash to storage silos in an enclosed system.
	CCR to be emplaced in the landfill will be conditioned before emplacement.
	Load CCR transport trucks from the CCR fly ash silos in a partially enclosed area.
	Load CCR transport trucks from the CCR fly ash silos using vented spouts.
	Load FGD ash transport trucks from the FGD ash silo using a pug mill or vented spouts, as necessary.
	Perform housekeeping, as necessary, in the fly ash loading area.
	Operate fly ash handling system in accordance with good operating practices.
	Maintain and repair as necessary dust controls on the fly ash handling system.
Transportation of CCR at the facility	CCR to be emplaced in the landfill is conditioned before emplacement.
	Limit the speed of vehicles to no more than 15 mph on facility roads.
	Sweep or rinse off the outside of the trucks transporting CCR, as necessary.
	Remove CCR, as necessary, deposited on facility road surfaces during transport.

Based on a review of the Plan and inspections associated with CCR fugitive dust control performed in the reporting year, the control measures identified in the Plan as implemented at the facility effectively minimized CCR from becoming airborne at the facility. No revisions or additions to control measures identified in the Plan were needed in this report. The Hennepin Power Plant ceased to operate and ceased to be a generating unit effective November 1, 2019.

No material changes occurred in the reporting year in site conditions potentially resulting in CCR fugitive dust becoming airborne at the facility that warrant an amendment of the Plan. The plan was amended to reflect administrative changes and adjustments to site condition controls.

Section 2 Record of Citizen Complaints

No citizen complaints were received regarding CCR fugitive dust at Hennepin Power Plant in the reporting year.

Section 2

Annual inspection report (Section 845.540(b)), including:

A) Annual hazard potential classification certification, if applicable (Section 845.440)

B) Annual structural stability assessment certification, if applicable (Section 845.450)

C) Annual safety factor assessment certification, if applicable (Section 845.460)

D) Inflow design flood control system plan certification (Section 845.510(c))

ANNUAL INSPECTION BY A QUALIFIED PROFESSIONAL ENGINEER 35 IAC § 845.540
(b)(1) The CCR surface impoundment must be inspected on an annual basis by a qualified professional engineer to ensure that the design, construction, operation, and maintenance of the CCR surface impoundment is consistent with recognized and generally accepted engineering standards. The inspection must, at a minimum, include: A) A review of available information regarding the status and condition of the CCR surface impoundment, including files available in the operating record (e.g., CCR surface impoundment design and construction information required by Sections 845.220(a)(1) and 845.230(d)(2)(A), previous structural stability assessments required under Section 845.450, the results of inspections by a qualified person, and results of previous annual inspections); B) A visual inspection of the CCR surface impoundment to identify signs of distress or malfunction of the CCR surface impoundment and appurtenant structures; C) A visual inspection of any hydraulic structures underlying the base of the CCR surface impoundment or passing through the dike of the CCR surface impoundment for structural integrity and continued safe and reliable operation; D) The annual hazard potential classification certification, if applicable (see Section 845.440); E) The annual structural stability assessment certification, if applicable (see Section 845.450); F) The annual safety factor assessment certification, if applicable (see Section 845.460); and G) The inflow design flood control system plan certification (see Section 845.510(c)).

SITE INFORMATION	
Site Name / Address / Date of Inspection	Hennepin Power Station Putnam County, Illinois 62327 9/14/2022
Operator Name / Address	Luminant Generation Company LLC 6555 Sierra Drive, Irving, TX 75039
CCR unit	Old West Polishing Pond

INSPECTION REPORT 35 IAC § 845.540	
(b)(1)(D) The annual hazard potential classification certification, if applicable (see Section 845.440).	Based on a review of the CCR unit's annual hazard potential classification, the unit is classified as a Class II CCR surface impoundment.
(b)(2)(A) Any changes in geometry of the structure since the previous annual inspection.	The Old West Polishing Pond was clean closed in 2020.
(b)(2)(B) The location and type of existing instrumentation and the maximum recorded readings of each instrument since the previous annual inspection	N/A
b)(2)(C) The approximate minimum, maximum, and present depth and elevation of the impounded water and CCR since the previous annual inspection;	N/A
b)(2)(D) The storage capacity of the impounding structure at the time of the inspection	Approximately 60 acre-feet
(b)(2)(E) The approximate volume of the impounded water and CCR contained in the unit at the time of the inspection.	Approximately 1 acre-feet of storm water only.
(b)(2)(F) Any appearances of an actual or potential structural weakness of the CCR unit, in addition to any existing conditions that are disrupting or have the potential to disrupt the operation and safety of the CCR unit	Based on a review of the CCR unit's records and visual observation during the on-site inspection, there was no appearance of an actual or potential structural weakness of the CCR unit, nor an existing condition that is disrupting or would disrupt the operation and safety of the unit.

INSPECTION REPORT 35 IAC § 845.540	
(b)(2)(G) Any other changes that may have affected the stability or operation of the impounding structure since the previous annual inspection.	Based on a review of the CCR unit's records and visual observation during the on-site inspection, no other changes which may have affected the stability or operation of the CCR unit have taken place since the previous annual inspection.
(b)(1)(G) The inflow design flood control system plan certification (see Section 845.510(c))	Based on a review of the CCR unit's records, the CCR unit is designed, operated, and maintained to adequately manage the flow from the peak discharge from the inflow design flood.

35 IAC § 845.540 - Annual inspection by a qualified professional engineer.

I, James Knutelski, P.E., certify under penalty of law that the information submitted in this report was prepared by me or under my direct supervision and that I am a duly Registered Professional Engineer under the laws of the state of Illinois. The information submitted, is to the best of my knowledge and belief, true, accurate and complete. Based on the annual inspection, the design, construction, operation, and maintenance of the CCR Unit is consistent with recognized and generally accepted good engineering standards. Based on a review of the records for the CCR unit and a visual inspection of the unit to document no material changes to the unit, the hazard potential classification was conducted in accordance with the requirements of Section 845.440, the structural stability assessment was conducted in accordance with the requirements of Section 845.450, the safety factor assessment was conducted in accordance with the requirements of Section 845.460, and the inflow design flood control system plan assessment was conducted in accordance with the requirements of Section 845.510.

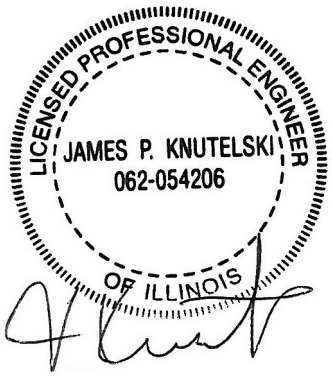

James Knutelski, PE
Illinois PE No. 062-054206, Expires: 11/30/2023
Date: 12/20/2022

Site Name: Hennepin Power Station
CCR Unit: Old West Polishing Pond

35 IAC § 845.540 (b)(2)(B)		
Instrument ID #	Type	Maximum recorded reading since previous annual inspection (ft)
None		

35 IAC § 845.540 (b)(2)(C)						
	Approximate Depth / Elevation					
Since previous inspection:	Elevation (ft)			Depth (ft)		
	Minimum	Present	Maximum	Minimum	Present	Maximum
Impounded Water		446			1	
CCR	0		0	0		0

ANNUAL INSPECTION BY A QUALIFIED PROFESSIONAL ENGINEER 35 IAC § 845.540
(b)(1) The CCR surface impoundment must be inspected on an annual basis by a qualified professional engineer to ensure that the design, construction, operation, and maintenance of the CCR surface impoundment is consistent with recognized and generally accepted engineering standards. The inspection must, at a minimum, include: A) A review of available information regarding the status and condition of the CCR surface impoundment, including files available in the operating record (e.g., CCR surface impoundment design and construction information required by Sections 845.220(a)(1) and 845.230(d)(2)(A), previous structural stability assessments required under Section 845.450, the results of inspections by a qualified person, and results of previous annual inspections); B) A visual inspection of the CCR surface impoundment to identify signs of distress or malfunction of the CCR surface impoundment and appurtenant structures; C) A visual inspection of any hydraulic structures underlying the base of the CCR surface impoundment or passing through the dike of the CCR surface impoundment for structural integrity and continued safe and reliable operation; D) The annual hazard potential classification certification, if applicable (see Section 845.440); E) The annual structural stability assessment certification, if applicable (see Section 845.450); F) The annual safety factor assessment certification, if applicable (see Section 845.460); and G) The inflow design flood control system plan certification (see Section 845.510(c)).

SITE INFORMATION	
Site Name / Address / Date of Inspection	Hennepin Power Station Putnam County, Illinois 62327 9/14/2022
Operator Name / Address	Luminant Generation Company LLC 6555 Sierra Drive, Irving, TX 75039
CCR unit	Old West Ash Pond

INSPECTION REPORT 35 IAC § 845.540	
(b)(1)(D) The annual hazard potential classification certification, if applicable (see Section 845.440).	Based on a review of the CCR unit's annual hazard potential classification, the unit is classified as a Class II CCR surface impoundment.
(b)(2)(A) Any changes in geometry of the structure since the previous annual inspection.	Capping and closure of the Old West Ash Pond complete.
(b)(2)(B) The location and type of existing instrumentation and the maximum recorded readings of each instrument since the previous annual inspection	See the attached.
b)(2)(C) The approximate minimum, maximum, and present depth and elevation of the impounded water and CCR since the previous annual inspection;	See the attached.
b)(2)(D) The storage capacity of the impounding structure at the time of the inspection	Capping and closure of the Old West Ash Pond complete.
(b)(2)(E) The approximate volume of the impounded water and CCR contained in the unit at the time of the inspection.	Approximately 310 acre-feet of capped and closed CCR.
(b)(2)(F) Any appearances of an actual or potential structural weakness of the CCR unit, in addition to any existing conditions that are disrupting or have the potential to disrupt the operation and safety of the CCR unit	Based on a review of the CCR unit's records and visual observation during the on-site inspection, there was no appearance of an actual or potential structural weakness of the CCR unit, nor an existing condition that is disrupting or would disrupt the operation and safety of the unit.

INSPECTION REPORT 35 IAC § 845.540	
(b)(2)(G) Any other changes that may have affected the stability or operation of the impounding structure since the previous annual inspection.	Based on a review of the CCR unit's records and visual observation during the on-site inspection, no other changes which may have affected the stability or operation of the CCR unit have taken place since the previous annual inspection.
(b)(1)(G) The inflow design flood control system plan certification (see Section 845.510(c))	Pond is closed and capped.

35 IAC § 845.540 - Annual inspection by a qualified professional engineer.

I, James Knutelski, P.E., certify under penalty of law that the information submitted in this report was prepared by me or under my direct supervision and that I am a duly Registered Professional Engineer under the laws of the state of Illinois. The information submitted, is to the best of my knowledge and belief, true, accurate and complete. Based on the annual inspection, the design, construction, operation, and maintenance of the CCR Unit is consistent with recognized and generally accepted good engineering standards. Based on a review of the records for the CCR unit and a visual inspection of the unit to document no material changes to the unit, the hazard potential classification was conducted in accordance with the requirements of Section 845.440, the structural stability assessment was conducted in accordance with the requirements of Section 845.450, the safety factor assessment was conducted in accordance with the requirements of Section 845.460, and the inflow design flood control system plan assessment was conducted in accordance with the requirements of Section 845.510.

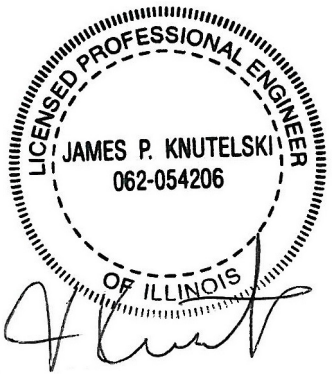

James Knutelski, PE
Illinois PE No. 062-054206, Expires: 11/30/2023
Date: 12/20/2022

Site Name: Hennepin Power Station

CCR Unit: Old West Ash Pond

35 IAC § 845.540 (b)(2)(B)		
Instrument ID #	Type	Maximum recorded reading since previous annual inspection (ft)
P002	Piezometer	abandoned
P003	Piezometer	abandoned

35 IAC § 845.540 (b)(2)(C)						
	Approximate Depth / Elevation					
Since previous inspection:	Elevation (ft)			Depth (ft)		
	Minimum	Present	Maximum	Minimum	Present	Maximum
Impounded Water						
CCR	460		465	19		24

Section 3

Annual Groundwater Monitoring and Corrective Action Report (Section 845.610(e))

Prepared for
Dynegy Midwest Generation, LLC

Date
January 31, 2023

Project No.
1940102203-011

2022 35 I.A.C. § 845 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT

WEST ASH POND SYSTEM
HENNEPIN POWER PLANT
HENNEPIN, ILLINOIS

IEPA ID NO. W1550100002-01 AND W1550100002-03

RAMBOLL Bright ideas. Sustainable change.

2022 35 I.A.C. § 845 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT
HENNEPIN POWER PLANT WEST ASH POND SYSTEM

Project name	**Hennepin Power Plant West Ash Pond System**
Project no.	**1940102203-011**
Recipient	**Dynegy Midwest Generation, LLC**
Document type	**Annual Groundwater Monitoring and Corrective Action Report**
Version	**FINAL**
Date	**January 31, 2023**
Prepared by	**Chase J. Christenson, PG**
Checked by	**Lauren D. Cook**
Approved by	**Brian G. Hennings, PG**
Description	**Annual Report in Support of 35 I.A.C. § 845**

Ramboll
234 W. Florida Street
Fifth Floor
Milwaukee, WI 53204
USA

T 414-837-3607
F 414-837-3608
https://ramboll.com

Chase J. Christenson, PG
Hydrogeologist

Brian G. Hennings, PG
Senior Managing Hydrogeologist

CONTENTS

FIGURES

ACRONYMS AND ABBREVIATIONS

§	Section
35 I.A.C.	Title 35 of the Illinois Administrative Code
CCA	compliance commitment agreement
CCR	coal combustion residuals
DMG	Dynegy Midwest Generation, LLC
GMP	Addendum to the Groundwater Monitoring Plan
GWPS	groundwater protection standard
HPP	Hennepin Power Plant
ID	identification
IEPA	Illinois Environmental Protection Agency
NID	National Inventory of Dams
No.	number
Ramboll	Ramboll Americas Engineering Solutions, Inc.
SI	surface impoundment
SSI	statistically significant increase
WAPS	West Ash Pond System

EXECUTIVE SUMMARY

This report has been prepared to provide the information required by Title 35 of the Illinois Administrative Code (35 I.A.C.) Section (§) 845.610(e) (*Annual Groundwater Monitoring and Corrective Action Report*) for the West Ash Pond System (WAPS) located at Hennepin Power Plant (HPP) near Hennepin, Illinois. The WAPS is recognized by coal combustion residuals (CCR) unit identification (ID) number (No.) 804, Illinois Environmental Protection Agency (IEPA) ID No. W1550100002-01 and W1550100002-03, and National Inventory of Dams (NID) No. IL50698.

As required by 35 I.A.C. § 845: Standards for the Disposal of Coal Combustion Residuals in Surface Impoundments, an operating permit application for the WAPS was submitted by Dynegy Midwest Generation, LLC (DMG) to IEPA by October 31, 2021 in accordance with the requirements specified in 35 I.A.C. § 845.230(d), and is pending approval. Therefore, the 35 I.A.C. § 845 compliance groundwater monitoring program at the WAPS has not been initiated. DMG will enter into a compliance commitment agreement (CCA) with IEPA prior to initiating groundwater monitoring. Groundwater monitoring in accordance with the proposed groundwater monitoring plan and sampling methodologies provided in the operating permit application for the WAPS is scheduled to commence no later than the second quarter of 2023. After the WAPS has been issued an approved operating permit, groundwater monitoring shall be conducted in accordance with that operating permit. As specified in the CCA, groundwater sampling requirements that apply to the CCR surface impoundment (SI) under other existing permit programs will become void upon issuance of an approved operating permit pursuant to 35 I.A.C § 845. In addition, and in accordance with the CCA, once groundwater monitoring commences, the groundwater monitoring performed under Section 1.5 of the approved Closure and Post-Closure Care Plan will cease.

This report summarizes the information collected in 2022 for the WAPS, and includes the following:

- A map showing the CCR SI and all proposed background (or upgradient) and downgradient monitoring wells, including their identification numbers, that are part of the proposed groundwater monitoring program for the WAPS (**Figure 1**).

1. INTRODUCTION

This report has been prepared by Ramboll Americas Engineering Solutions, Inc. (Ramboll) on behalf of DMG, to provide the information required by 35 I.A.C. § 845.610(e) for the WAPS located at HPP near Hennepin, Illinois. The owner or operator of a CCR SI must prepare and submit to IEPA by January 31st of each year an Annual Groundwater Monitoring and Corrective Action Report for the preceding calendar year as part of the Annual Consolidated Report required by 35 I.A.C. § 845.550. The Annual Groundwater Monitoring and Corrective Action Report shall document the status of the groundwater monitoring and corrective action plan for the CCR SI, summarize key actions completed, including the status of permit applications and Agency approvals, describe any problems encountered and actions to resolve the problems, and project key activities for the upcoming year.

At a minimum, the annual report must contain the following information, to the extent available:

A. A map, aerial image, or diagram showing the CCR SI and all background (or upgradient) and downgradient monitoring wells, including the well identification numbers, that are part of the groundwater monitoring program for the CCR SI, and a visual delineation of any exceedances of the [groundwater protection standard] GWPS.

B. Identification of any monitoring wells that were installed or decommissioned during the preceding year, along with a narrative description of why those actions were taken.

C. A potentiometric surface map for each groundwater elevation sampling event required by 35 I.A.C. § 845.650(b)(2).

D. In addition to all the monitoring data obtained under 35 I.A.C. §§ 845.600-680, a summary including the number of groundwater samples that were collected for analysis for each background and downgradient well, and the dates the samples were collected.

E. A narrative discussion of any statistically significant increases (SSIs) over background levels for the constituents listed in 35 I.A.C. § 845.600.

F. Other information required to be included in the annual report as specified in 35 I.A.C. §§ 845.600-680.

A section at the beginning of the annual report that provides an overview of the current status of the groundwater monitoring program and corrective action plan for the CCR SI. At a minimum, the summary must:

A. Specify whether groundwater monitoring data shows a SSI over background concentrations for one or more constituents listed in 35 I.A.C. § 845.600.

B. Identify those constituents having a SSI over background concentrations and the names of the monitoring wells associated with the SSI(s).

C. Specify whether there have been any exceedances of the GWPS for one or more constituents listed in 35 I.A.C. § 845.600.

D. Identify those constituents with exceedances of the GWPS in 35 I.A.C. § 845.600 and the names of the monitoring wells associated with the exceedance.

E. Provide the date when the assessment of corrective measures was initiated for the CCR SI.

F. Provide the date when the assessment of corrective measures was completed for the CCR SI.

G. Specify whether a remedy was selected under 35 I.A.C. § 845.670 during the current annual reporting period, and if so, the date of remedy selection.

H. Specify whether remedial activities were initiated or are ongoing under 35 I.A.C. § 845.780 during the current annual reporting period.

This report summarizes the information collected in 2022 for the WAPS, and includes the following:

- A map showing the CCR SI and all proposed background (or upgradient) and downgradient monitoring wells, including their identification numbers, that are part of the proposed groundwater monitoring program for the WAPS (**Figure 1**).

2. MONITORING AND CORRECTIVE ACTION PROGRAM STATUS

An operating permit application for the WAPS was submitted by DMG to IEPA by October 31, 2021 in accordance with the requirements specified in 35 I.A.C. § 845.230(d), and is pending approval. Therefore, the 35 I.A.C. § 845 groundwater monitoring program at the WAPS has not been initiated. DMG will enter into a CCA with IEPA prior to initiating groundwater monitoring. Groundwater monitoring in accordance with the proposed groundwater monitoring plan and sampling methodologies provided in the operating permit application for the WAPS is scheduled to commence no later than the second quarter of 2023. After the WAPS has been issued an approved operating permit, groundwater monitoring shall be conducted in accordance with that operating permit. As specified in the CCA, groundwater sampling requirements that apply to the CCR SI under other existing permit programs will become void upon issuance of an approved operating permit pursuant to 35 I.A.C § 845. In addition, and in accordance with the CCA, once groundwater monitoring commences, the groundwater monitoring performed under Section 1.5 of the approved Closure and Post-Closure Care Plan will cease.

3. KEY ACTIONS COMPLETED IN 2022

The proposed 35 I.A.C. § 845 monitoring well network is presented in **Figure 1.** Groundwater monitoring activities as required by other State and Federal programs are summarized in the addendum to the groundwater monitoring plan (GMP; Ramboll, 2021).

4. PROBLEMS ENCOUNTERED AND ACTIONS TO RESOLVE THE PROBLEMS

Groundwater monitoring in accordance with the proposed groundwater monitoring plan using sampling methodologies provided in the operating permit application for the WAPS is scheduled to commence no later than the second quarter of 2023. After the WAPS has been issued an approved operating permit, groundwater monitoring shall be conducted in accordance with that operating permit.

5. KEY ACTIVITIES PLANNED FOR 2023

The following key activities are planned for 2023:

- Groundwater monitoring in accordance with the proposed groundwater monitoring plan and sampling methodologies provided in the operating permit application for the WAPS is scheduled to commence no later than the second quarter of 2023. After the WAPS has been issued an approved operating permit, groundwater monitoring shall be conducted in accordance with that operating permit. As specified in the CCA, groundwater sampling requirements that apply to the CCR SI under other existing permit programs will become void upon issuance of an approved operating permit pursuant to 35 I.A.C § 845. In addition, and in accordance with the CCA, once groundwater monitoring commences, the groundwater monitoring performed under Section 1.5 of the approved Closure and Post-Closure Care Plan will cease. Groundwater monitoring will include:
  - Monthly groundwater elevations
  - Quarterly groundwater sampling
- Pressure transducers equipped with data loggers are being purchased for measurement of monthly water level elevations. Deployment of the transducers, monitoring well inspections, and redevelopment of the monitoring wells will be completed prior to initiating groundwater monitoring in the second quarter of 2023.

6. REFERENCES

Illinois Environmental Protection Agency (IEPA), 2021. *In the Matter of: Standards for the Disposal of Coal Combustion Residuals in Surface Impoundments: Title 35 Illinois Administration Code 845, Addendum*. April 15, 2021.

Ramboll Americas Engineering Solutions, Inc. (Ramboll), 2021. *Addendum to the Groundwater Monitoring Plan.* Hennepin Power Plant, West Ash Pond System, Hennepin, Illinois. Dynegy Midwest Generation, LLC. October 25, 2021.

FIGURES

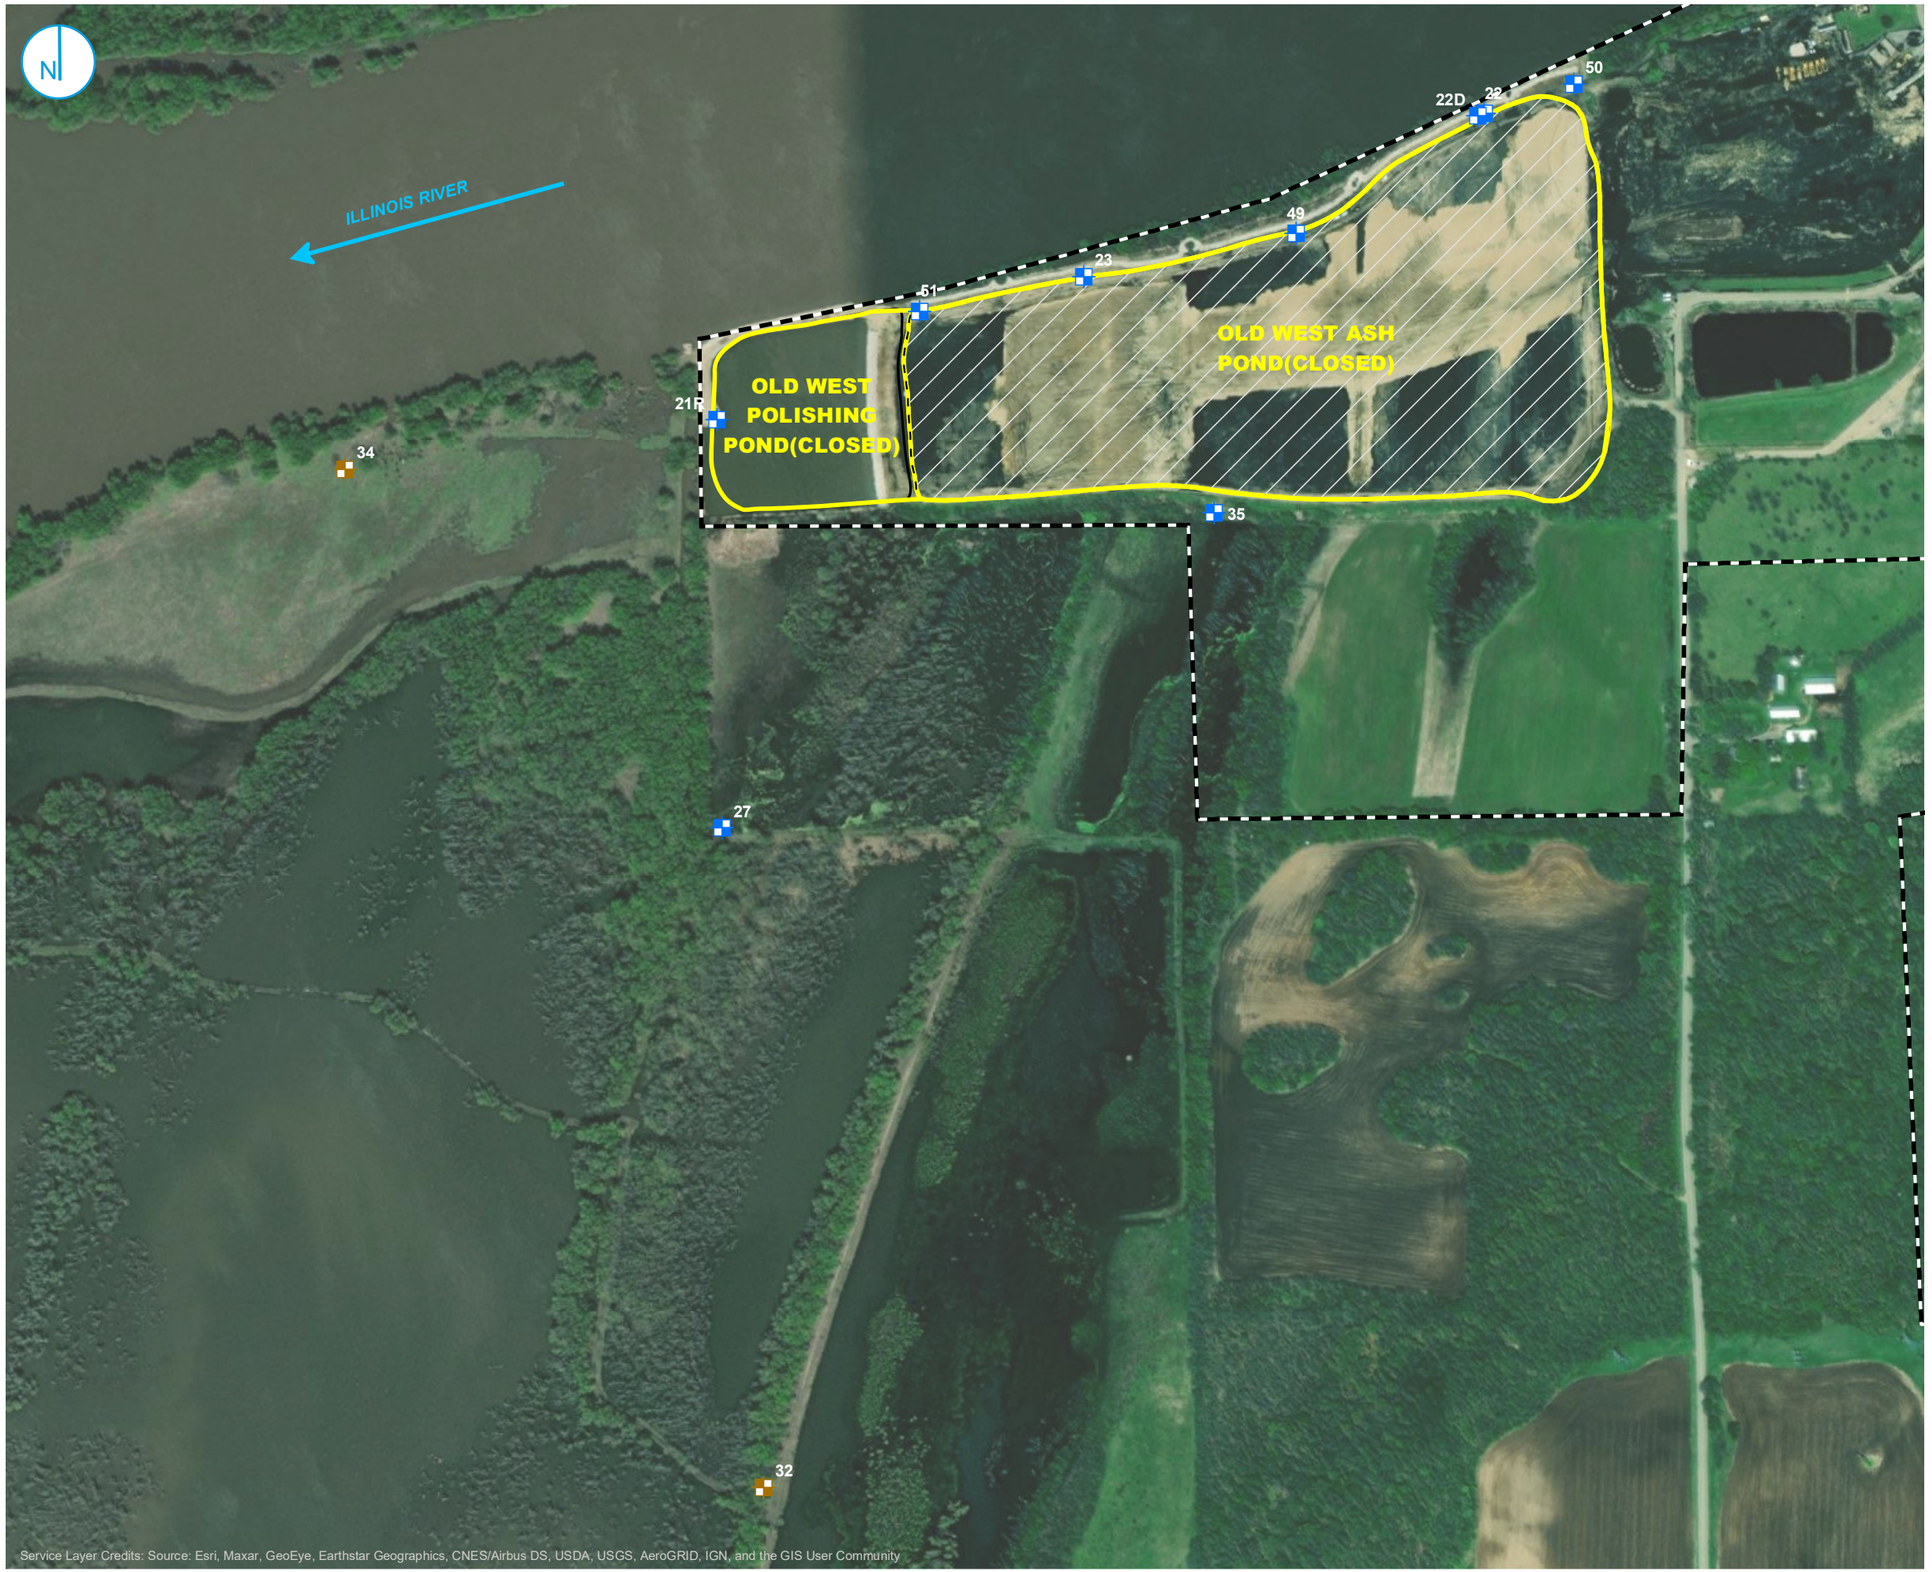

BACKGROUND WELL
COMPLIANCE WELL
PART 845 REGULATED UNIT (SUBJECT UNIT)
LIMITS OF FINAL COVER
PROPERTY BOUNDARY

0 200 400
Feet

PROPOSED PART 845 GROUNDWATER MONITORING WELL NETWORK

ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT
WEST ASH POND SYSTEM
HENNEPIN POWER PLANT
HENNEPIN, ILLINOIS

FIGURE 1

RAMBOLL AMERICAS
ENGINEERING SOLUTIONS, INC.

RAMBOLL

Y:\Mapping\Projects\22\2285\MXD\845_Operating_PermitHennepin\GMP_804\Figure 2-1_Proposed Monitoring Well Network.mxd

PROJECT: 169000XXXX | DATED: 9/29/2021 | DESIGNER: STOLZSD